



The Logitech Tap provides a plug-and-play solution to extend Mersive Solstice's in-room collaboration experience to remote participants with Microsoft Teams, Zoom, or Google Meet. Users can start collaborating with Solstice the moment they walk into a meeting space and seamlessly invite remote participants to join via the conferencing service of choice on the Logitech Tap.


Key Capabilities

- Start your Microsoft Teams, Zoom Rooms, or Google Meet meeting with one-touch join
- Wirelessly share content in-room from Windows, Mac, iOS, and Android devices
- Unify in-room wireless collaboration with remote video conferencing
- Optional: Logitech Rally and Logitech MeetUp offer complete room video and audio support

System Requirements

- Solstice Pod
- Logitech Tap
- Room PC running Zoom Rooms, Microsoft Teams Rooms, or Google Meet
- Logitech Rally, MeetUp, or other compatible AV devices (optional)
- Internet access via Ethernet with DHCP enabled
- Display or projector with HDMI input
- HDMI cable x2, Logitech Strong 10m USB-A to USB-C cable (included with most Logitech AV devices)
- Optional: Logitech Tap mounts (various), Logitech Strong 25m USB-A to USB-C cable

Installation Instructions

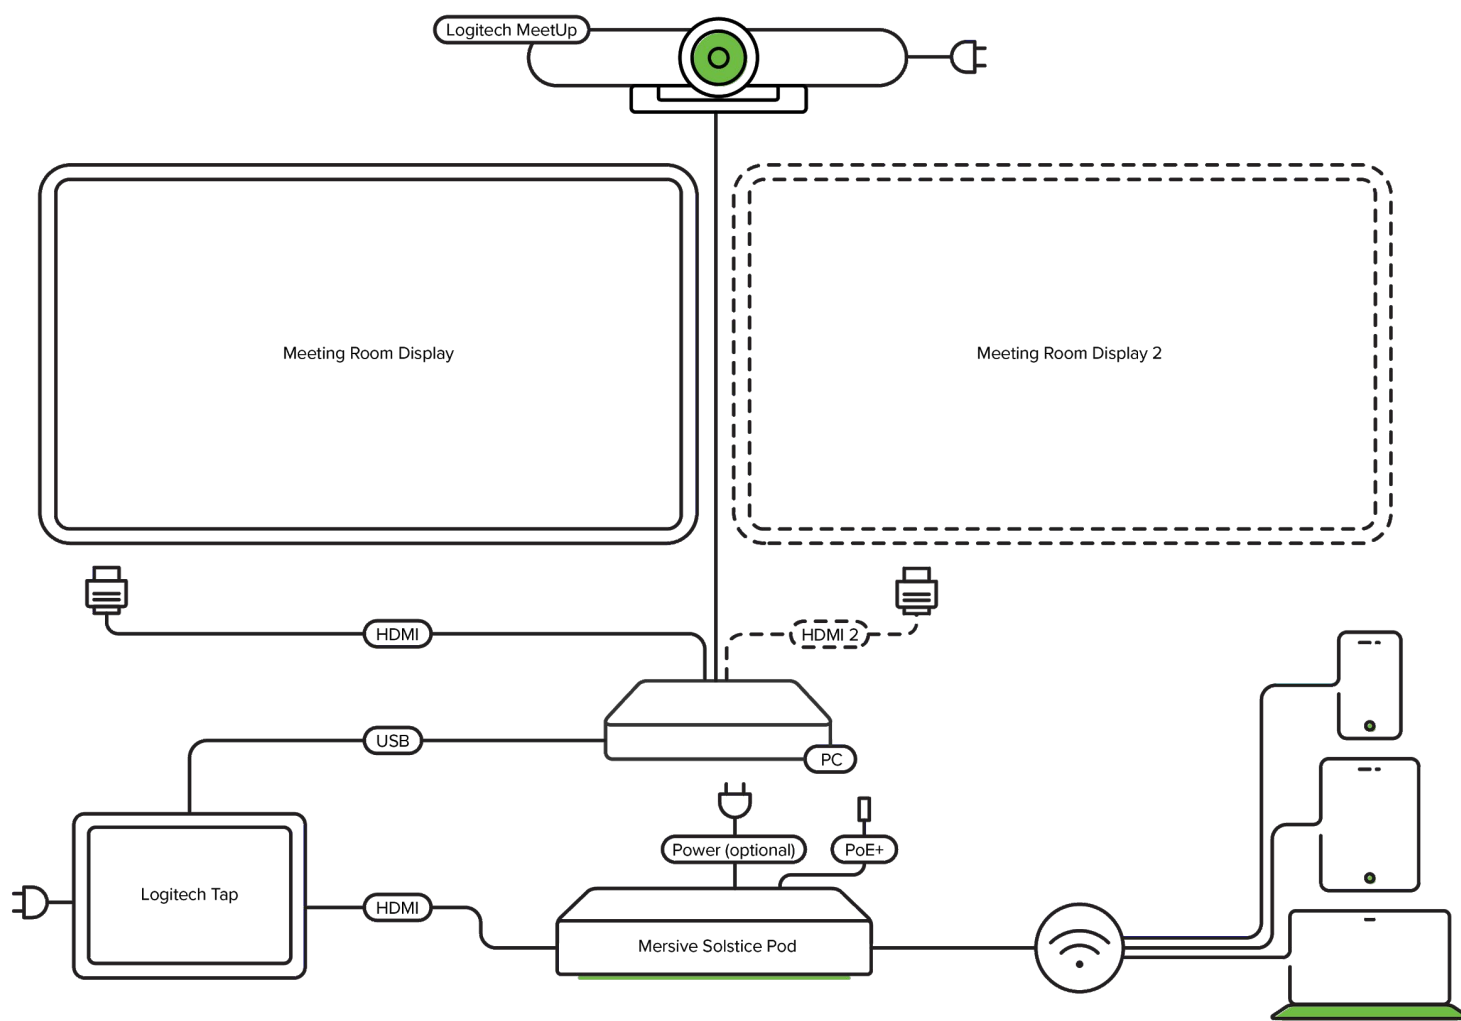

Follow the instructions below to set up the Logitech Tap, connect the Solstice Pod, and configure the conferencing system.

1. Connect the Logitech Tap to the conference control.
2. Connect the PC running your conferencing service to both power and the network.
3. Connect the PC running your conferencing service to the room display.
4. Connect a conference camera, such as Logitech Rally or MeetUp ConferenceCam, you can connect it to the PC running your conferencing service via USB.
5. Attach the Solstice Pod to power and the local Ethernet and/or wireless network (PoE+ supported).
6. Connect the Solstice Pod's HDMI output (outer HDMI 1 port) to the Tap's HDMI input.
7. Optional: Connect an HDMI cable from Solstice Pod's HDMI in port and place the other end of the cable in a place that can be accessed by meeting participants for wired screen sharing.
8. If required, use the Tap to configure the conferencing service to automatically share Solstice's HDMI connection when the meeting begins.

Product Specifications

Solstice Pod Gen3


Part #: SP-8000-E1



Size:	184.2mm x 86.2mm x 26.3mm	Output:	HDMI 2.0 + HDMI 1.4 output with audio, 8-channel 7.1 surround sound stereo output
Weight:	0.75 lbs (340g)	Other I/O:	2x USB-A 3.0, USB-C
Power:	PoE+ or DC 12V @ 2A max	Ethernet:	RJ45 Gigabit
Processors:	Qualcomm Snapdragon™ 820, quad-core Kryo™ CPU	Wireless:	Dual band, 802.11ac 2x2 MIMO
Storage:	4GB RAM, 16GB eMMC Flash Storage	Warranty:	1-year limited hardware warranty

Logitech Tap

Part #: 939-001796

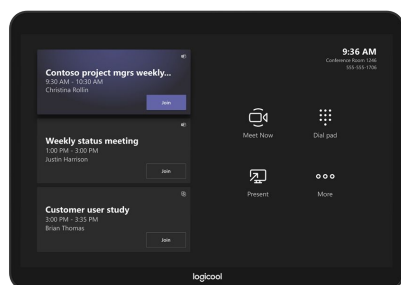

Size:	58mm x 244mm x 179mm	Output:	USB-C, USB-A, 3.5mm 4 Pole Audio, 2x USB 3.1
Weight:	1.1 oz (30g)	Input:	HDMI
Power:	Power Adapter with regional plugs (100-240V)	Ethernet:	RJ45 Gigabit
Inclusions:	10m USB-A to USB-C cable, 2m HDMI 1.4a cable, VESA Mounting screws (4)	Warranty:	2-year limited hardware warranty

How to Buy

Please contact sales@mersive.com for purchase options.