



Complete Collaboration Solution for Small to Midsize Meeting Spaces

Solstice Conference paired with the Huddly GO meeting room camera and a supported USB mic combines the reach of video conferencing with the power of rich, multi-participant content sharing to enhance the collaboration experience between onsite and remote users.

This room solution delivers the convenience of a traditional room system with the flexibility to use any conferencing service installed on the meeting host's laptop.

Solstice Conference


- Multi-participant content sharing from any device
- Agnostic support for all major conferencing services
- Easy, one-step start from the meeting host's laptop
- Connects Huddly GO meeting room camera through USB
- Enterprise-grade security and fully IT-compliant
- Cloud-based deployment management and analytics

Huddly GO

- Ultra Wide-Angle 150° wide-angle lens
- HD 720p 30fps output
- Dynamic Light Optimization

Meeting Host Laptop

- Requires Windows or macOS laptops to host meetings
- Supports Zoom, Teams, and most other conferencing apps

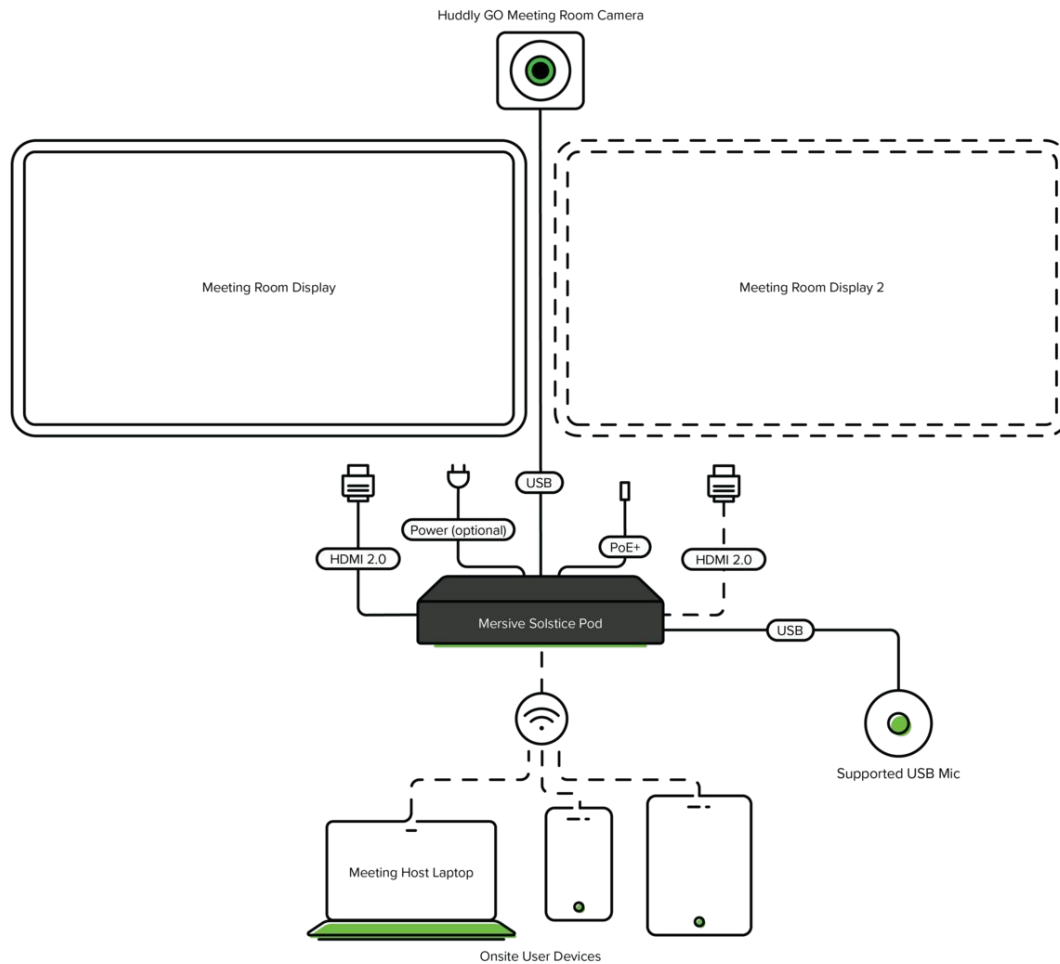

System Components

Solstice Conference

Solstice Pod Gen3
HDMI cable
Power supply

Huddly GO

Huddly GO camera
Power supply

Additional Requirements

Meeting host laptop
(Windows or macOS)
Web conferencing service
(Teams, Zoom, etc.)
Supported USB mic
USB 2.0 cable

Installation Instructions

1. Connect the Huddly GO meeting room camera to one of the USB ports on the back of the Solstice Pod using a USB 2.0 cable.
2. (Optional) Connect a [supported USB mic](#) to one of the USB ports on the back of the Solstice Pod.
3. (Optional) Connect a speaker to the audio out port on the back of the Solstice Pod.
4. Attach the Solstice Pod to power and the local Ethernet and/or wireless network (PoE+ supported).
5. Connect the Pod to the display monitor via HDMI (outer HDMI 1 port recommended). An optional second display monitor can also be connected to the Pod.
6. As a note, Mersive recommends configuring the Solstice Pod's basic settings, such as updating the display name to match the room name.

For conferencing support, meeting hosts simply install the Solstice app on their laptop device along with their web conferencing application of choice. As a note, the host laptop must be connected to the same network as the Pod.

Technical Specifications

Solstice Pod Gen3

Part #: SP-8000-E1



Supported user devices	Windows, macOS, iOS, Android, Chromebook, Linux
Number of users	Unlimited
Number of content posts	Unlimited
Solstice app features	Conferencing Support (meeting hosts only, Windows and macOS supported) Share desktop, application window, image file, video file Intuitive drag-and-drop layout control Wireless annotation via smartphone
App-free sharing	AirPlay, Miracast, browser-based sharing, HDMI input
Streaming video support	4K UHD, Full HD, HD, SD
Network connection	Ethernet, WiFi, VLAN (x3)
Wireless frequency band	2.4 GHz and 5 GHz;
Security features	2048-bit network encryption Firewall protection between networks 802.1x authentication Access controls and moderation User authentication at runtime (optional)
Additional features	Wireless USB peripheral support Dual display support Touch display support Microsoft Exchange and O365 calendar support Digital signage playback API for third-party integrations Cloud-based management and meeting analytics
Warranty	1-year limited hardware warranty with option to extend to 3 years

Huddly GO

Part #: 7090043790467



Meeting Room Camera	16 Megapixels 1/2.3" CMOS Sensor Wide-angle six-element glass lens Horizontal field of view 120° Vertical field of view 90° Diagonal field of view 150° f/2.8 aperture 16:9 aspect ratio output
Features	720p HD @ 30 fps High-quality scaling and dewarping 3D noise reduction Automatic white balance Automatic color correction Optical aberration correction 4x digital zoom Low latency video processing 180° Auto-Flip (when mounted upside down)
Video Compression	MJPEG, YUV 4:2:2 and 4:2:0 support over USB 3 MJPEG support over USB 2
Connection Types	USB Type-C connector SuperSpeed USB 3 HighSpeed USB 2 (Requires 5V 900 mA power supply)
Mounting options	Embedded Mounting Hinge Camera tripod mount
Warranty	2-year limited hardware warranty

Please contact sales@mersive.com for purchase options.